



# PLAIN TROLLEY KW-II GEARED TROLLEY KW-III

**VITALI-INTL® Plain Trolley KW-II**

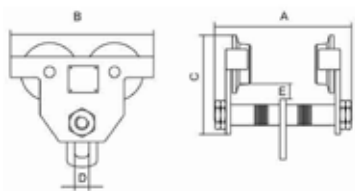

| MODEL NO.         |      | KW010A | KW020A | KW030A  | KW050A  | KW100A  |
|-------------------|------|--------|--------|---------|---------|---------|
| Capacity          | (t)  | 1      | 2      | 3       | 5       | 10      |
| Proof Load        | (t)  | 1.5    | 3      | 4.5     | 7.5     | 15      |
| I-Beam Width      | (mm) | 64-203 | 88-203 | 100-203 | 114-203 | 125-210 |
| Dimensions (mm)   | A    | 296    | 313    | 334     | 363     | 410     |
|                   | B    | 257    | 300    | 340     | 380     | 389     |
|                   | C    | 181    | 214.5  | 252     | 290     | 364.5   |
|                   | D    | 30     | 36     | 45      | 60      | 80      |
|                   | E    | 23.5   | 23.5   | 32.5    | 28      | 48      |
| Min. Radius Curve | (m)  | 1      | 1.1    | 1.3     | 14      | 1.7     |
| Net Weight        | (kg) | 12.8   | 18.8   | 33.7    | 50.7    | 88      |

**VITALI-INTL® Geared Trolley KW-III**

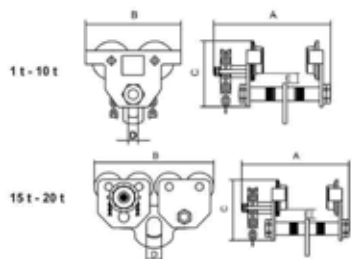


| MODEL NO.         |      | KW010B | KW020B | KW030B  | KW050B  | KW100B  | KW150B  | KW200B  |
|-------------------|------|--------|--------|---------|---------|---------|---------|---------|
| Capacity          | (t)  | 1      | 2      | 3       | 5       | 10      | 15      | 20      |
| Proof Load        | (t)  | 1.5    | 3      | 4.5     | 7.5     | 15      | 22.5    | 30      |
| I-Beam Width      | (mm) | 64-203 | 88-203 | 100-203 | 144-203 | 125-210 | 125-210 | 125-210 |
| Dimensions (mm)   | A    | 344    | 362    | 383     | 416     | 461     | 480     | 480     |
|                   | B    | 257    | 300    | 340     | 380     | 389     | 789     | 789     |
|                   | C    | 181    | 214.5  | 252     | 290     | 364.5   | 364.5   | 364.5   |
|                   | D    | 30     | 36     | 45      | 60      | 80      | 100     | 100     |
|                   | E    | 23.5   | 23.5   | 32.5    | 28      | 48      | 48      | 48      |
| Min. Radius Curve | (m)  | 1      | 1.1    | 1.3     | 1.4     | 1.7     | 1.7     | 1.7     |
| Net Weight        | (kg) | 17     | 23.5   | 38.7    | 55.7    | 93      | 176     | 191     |

Standard 3 meter length hand chain. Custom lengths available.


# BEAM CLAMP TBC QUICK INSTALL TROLLEY QIT

## VITALI-INTL® Beam Clamp TBC

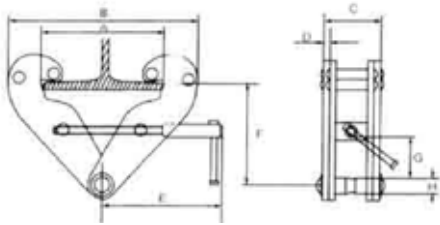

| MODEL NO.       |          | TBC-1  | TBC-2  | TBC-3  | TBC-5  | TBC-10 |
|-----------------|----------|--------|--------|--------|--------|--------|
| Capacity        | (tonnes) | 1      | 2      | 3      | 5      | 10     |
| Proof Load      | (tonnes) | 1.5    | 3      | 4.5    | 7.5    | 15     |
| I-Beam Width    | (mm)     | 75-220 | 75-220 | 80-320 | 80-320 | 80-350 |
| Dimensions (mm) | A (max.) | 260    | 260    | 354    | 354    | 400    |
|                 | B (min.) | 180    | 180    | 235    | 235    | 250    |
|                 | B (max.) | 360    | 360    | 490    | 490    | 520    |
|                 | C        | 64     | 74     | 103    | 110    | 120    |
|                 | D        | 5      | 6      | 8      | 10     | 12     |
|                 | E        | 215    | 215    | 260    | 260    | 280    |
|                 | F (max.) | 155    | 155    | 225    | 225    | 230    |
|                 | F (min.) | 102    | 102    | 140    | 140    | 160    |
|                 | G        | 25     | 25     | 45     | 45     | 70     |
| H               | 22       | 22     | 24     | 28     | 44     |        |
| Net Weight      | (kg)     | 4.0    | 4.6    | 9.1    | 11.0   | 14.6   |
| Net Weight      | (kg)     | 4.5    | 5.1    | 9.6    | 12.0   | 15.6   |

## VITALI-INTL® Quick Install Trolley QIT

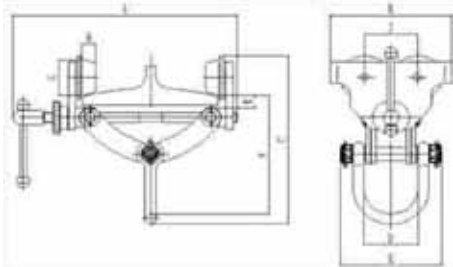

| MODEL NO.         |          | QIT10   | QIT30   | QIT50   |
|-------------------|----------|---------|---------|---------|
| Capacity          | (tonnes) | 1       | 3       | 5       |
| Proof Load        | (tonnes) | 1.5     | 4.5     | 7.5     |
| I-Beam Width      | (mm)     | 75-130  | 75-200  | 100-300 |
| Dimensions (mm)   | A        | 240     | 355     | 455     |
|                   | B        | 174     | 280     | 346     |
|                   | C        | 258-278 | 317-361 | 440-519 |
|                   | D        | 80      | 90      | 110     |
|                   | E        | 22      | 22      | 75      |
|                   | F        | 178-198 | 199-243 | 300-379 |
|                   | G        | 57      | 80      | 100     |
|                   | H        | 20      | 24.5    | 27.5    |
|                   | J        | 78      | 130     | 150     |
|                   | K        | 150     | 210     | 210     |
| Min. Radius Curve | (m)      | 1       | 1.3     | 1.7     |
| Net Weight        | (kg)     | 6.2     | 18.2    | 31.8    |